



MACCHINE AGRICOLE

**BADALINI**

BADALINI SRL Strada Delmona 1  
46017 RIVAROLO MANTOVANO (MANTOVA) ITALY  
TEL. +39-0376-99149 FAX +39-0376-99641  
E-MAIL: badalini@badalini.it WEB: www.badalini.it

# COMBINATA

## ED/

*HYDRAULIC AND INDEPENDENT REGULATION OF THE  
DISCS (FRONT AND REAR)*





## TECHNICAL FEATURES

The frame is manufactured in steel of great thickness. The slots of the lock-pin let the disc harrow oscillate to pass the roughness of the soil. The third point keeps the machine always close to the soil.

The disc group is composed by four independent sections. Their working inclination can be controlled from the driver's seat on the numerical indicator by an hydraulic device.

The inclination of the front groups can be regulated independently from the rear ones. This allows to flatten the ground or to vary the work according to the conditions.

The bearings of the sections are mounted in strong steel supports provided with double dust cover and four grommets. A lubricator permits the periodical reloading of grease.

The discs, of new conception, are manufactured in steel to resist to wear and tear and collisions. The spacers are composed by shock resistant flanges in stamped steel. The scrapers can be regulated singularly to recuperate the space caused by wear and tear.

The central disc is supported by a strong steel support with long-life bearings protected by the dust cover and the grease of the grommet.

The road circulation is possible thank to a simple move which allows the sections of the disc harrow to fold for road transport, reaching a width lower than meters 2,50.

This can be obtained trough an hydraulic device controlled from the driver's seat.







**EQUIPMENT:**

*CE Regulations equipments*

*Oscillation of the 4 sections*

*Hydraulic device for inclination regulation*

*Central disc*

*Dimension reduction for road transport*

*Ballastable frame till 1700 Kilos*

*Extra-protected and lasting bearing supports*

HP	MODEL	DISCS NR.	DISCS mm	DIMENSIONS m	WEIGHT
100-180	<b>EPX/61x16</b>	16	610	2,25	1300
110-180	<b>EPX/61x20</b>	20	610	2,75	1400
120-180	<b>EPX/61x24</b>	24	610	3,25	1500
<b><i>MACHINE WITH FRONT SUBSOILER AND BACK LEVELLING HARROW</i></b>					
140-200	<b>RPX/61x24S</b>	24	610	3,25	1850

**LASTING  
BEARING  
SUPPORTS**



**HYDRAULIC  
FOLDING FRAME**






# EPV/

## DISC HARROW

FOR TRACTORS 80/120 HP

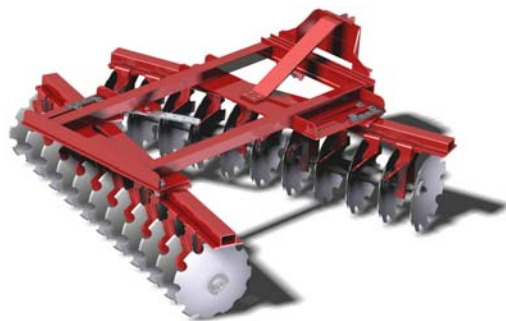

STANDARD EQUIPMENT:

*CE Regulations equipments*

*Independent regulation of front and rear sections*

*Extra-protected and lasting bearing supports*

HP	MODEL	DISCS NR.	DISCS mm	DIMENSIONS m	WEIGHT
100-180	<b>EPV/61x22</b>	22	610	2,60	1100
110-180	<b>EPV/61x24</b>	24	610	2,85	1200
120-180	<b>EPV/61x26</b>	26	610	3,10	1300



MACCHINE AGRICOLE

# BADALINI

**BADALINI S.R.L.** Registered Office: Strada Delmona 1

46017 RIVAROLO MANTOVANO (Mn) - ITALY

TEL. 0039/0376/99149 FAX 0039/0376/99641

[badalini@badalini.it](mailto:badalini@badalini.it) [www.badalini.it](http://www.badalini.it)





**PREPARATORE**





STANDARD EQUIPMENT:

*CE Regulations equipments*

*Independent regulation of front and rear sections*

*Hydraulic device for depth adjustment*

*Oscillating independent discs*

*Frame in high-strength material*

*Extra-protected and lasting bearing supports*



HP	MODEL	DISCS NR.	DISCS mm	WORK m	WEIGHT kg
110-150	<b>ED/56x16</b>	16	560	2,50	1550
120-180	<b>ED/56x20</b>	20	560	3,00	1150
140-210	<b>ED/56x24</b>	24	560	3,50	1750
<b><i>MACHINE with DOUBLE HYDRAULIC ROLLER</i></b>					
120-180	<b>ED/56x20R</b>	20	560	3,00	1800
<b><i>MACHINE WITH ROLLER AND SUBSOILER (6 TINES)</i></b>					
200-300	<b>EDRX/56x20</b>	20	560	3,25	3000

ON REQUEST:

**DISC WITH BRACKET**

**DOUBLE HYDRAULIC ROLLER 3 meters**

**COMPLETE TINE Mod. "C"**



























MACCHINE AGRICOLE

**BADALINI**

**BADALINI SRL** Strada Delmona 1

46017 RIVAROLO MANTOVANO (MANTOVA) ITALY

TEL. +39-0376-99149 FAX +39-0376-99641

E-MAIL: [badalini@badalini.it](mailto:badalini@badalini.it) WEB: [www.badalini.it](http://www.badalini.it)

# ***DISC HARROW*** **RAGNO** ***EPX/***

***HYDRAULIC ROAD CLOSING TO m 2,50***

***HYDRAULIC AND INDEPENDENT REGULATION OF THE  
DISCS (FRONT AND REAR)***





## TECHNICAL FEATURES

The frame is manufactured in steel of great thickness. The slots of the lock-pin let the disc harrow oscillate to pass the roughness of the soil. The third point keeps the machine always close to the soil.

The disc group is composed by four independent sections. Their working inclination can be controlled from the driver's seat on the numerical indicator by an hydraulic device.

The inclination of the front groups can be regulated independently from the rear ones. This allows to flatten the ground or to vary the work according to the conditions.

The bearings of the sections are mounted in strong steel supports provided with double dust cover and four grommets. A lubricator permits the periodical reloading of grease.

The discs, of new conception, are manufactured in steel to resist to wear and tear and collisions. The spacers are composed by shock resistant flanges in stamped steel. The scrapers can be regulated singularly to recuperate the space caused by wear and tear.

The central disc is supported by a strong steel support with long-life bearings protected by the dust cover and the grease of the grommet.

The road circulation is possible thank to a simple move which allows the sections of the disc harrow to fold for road transport, reaching a width lower than meters 2,50.

This can be obtained trough an hydraulic device controlled from the driver's seat.







**EQUIPMENT:**

*CE Regulations equipments*

*Oscillation of the 4 sections*

*Hydraulic device for inclination regulation*

*Central disc*

*Dimension reduction for road transport*

*Ballastable frame till 1700 Kilos*

*Extra-protected and lasting bearing supports*

HP	MODEL	DISCS NR.	DISCS mm	DIMENSIONS m	WEIGHT
100-180	<b>EPX/61x16</b>	16	610	2,25	1300
110-180	<b>EPX/61x20</b>	20	610	2,75	1400
120-180	<b>EPX/61x24</b>	24	610	3,25	1500
<b><i>MACHINE WITH FRONT SUBSOILER AND BACK LEVELLING HARROW</i></b>					
140-200	<b>RPX/61x24S</b>	24	610	3,25	1850

**LASTING  
BEARING  
SUPPORTS**



**HYDRAULIC  
FOLDING FRAME**






# EPV/

## DISC HARROW

FOR TRACTORS 80/120 HP

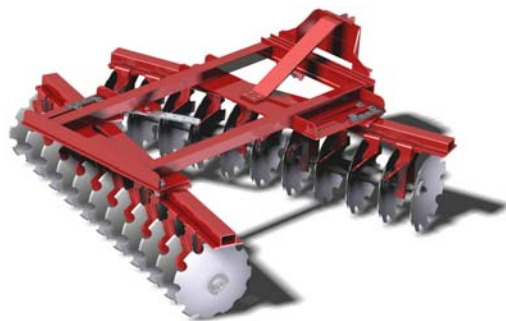

STANDARD EQUIPMENT:

*CE Regulations equipments*

*Independent regulation of front and rear sections*

*Extra-protected and lasting bearing supports*

HP	MODEL	DISCS NR.	DISCS mm	DIMENSIONS m	WEIGHT
100-180	<b>EPV/61x22</b>	22	610	2,60	1100
110-180	<b>EPV/61x24</b>	24	610	2,85	1200
120-180	<b>EPV/61x26</b>	26	610	3,10	1300



MACCHINE AGRICOLE

# BADALINI

**BADALINI S.R.L.** Registered Office: Strada Delmona 1

46017 RIVAROLO MANTOVANO (Mn) - ITALY

TEL. 0039/0376/99149 FAX 0039/0376/99641

[badalini@badalini.it](mailto:badalini@badalini.it) [www.badalini.it](http://www.badalini.it)