



INTER-ROW CULTIVATORS for biological agriculture



1963
THE PROFESSIONAL



1955





ROMEO ROTARY HARROW



- ⇒ GREAT RELIABILITY.
- ⇒ MANUFACTURED WITH CERTIFIED MATERIALS.
- ⇒ TESTED BY YEARS OF EXPERIENCE.
- ⇒ EACH ROLLING STAR IS MOUNTED ON DOUBLE BEARINGS WITH DUST COVER.
- ⇒ EVERY ROLLING UNIT WITH FIVE STARS IS OSCILLANT IN THE DIRECTION OF THE TRACTOR.
- ⇒ THE ROLLING UNIT WITH FIVE STARS FOLLOWS THE CONTOUR OF THE SOIL WORKING ON A PARALLELEPIPED.
- ⇒ EVERY PARALLELEPIPED CAN BE REGULATED BY AN INDEPENDENT PRESSURE SPRING.
- ⇒ THE SHAPE OF THE ROLLING STARS MAKES POSSIBLE NOT TO DAMAGE THE GERMINATED PLANTS, EVEN IF SOME OF THEM ARE STILL COME OUT OF THE SOIL.



STANDARD EQUIPMENT:

CE Regulations equipments

5 stars for each unit

Stars on double bearings and dust cover

Parallelogram with adjustable pressure spring

Oscillant frames with central joint and lubricator

Parallelogram with 4 lubricators and hard metal bushings

ROMEO

WORK **ON ROWS**

FOR SOYA BEANS AND SUGAR BEETS

N.	ROWS mm	MODEL	FRAME meters	WEIGHT kg
6	450-500	RHF/6	3,00 fixed	410
12	450-500	RHI/12 *	HYDRAULIC *	1150

WORK **ON ROWS**

FOR MAIZE AND SUNFLOWERS

4	600-750	RHF/4-25	2,50 fixed	297
6	700-750	RHR/6	FOLDING	470
6	700	RHI/6	HYDRAULIC	500
6	750	RHI/6	HYDRAULIC	500
8	700-750	RHI/8 *	HYDRAULIC *	1030

TOTAL WORK

FOR ALL CULTIVATIONS

-	300-800	RHF/8 (total 3 meters)	3,00 fixed	530
-	300-800	RHR/8 (total 3 meters)	FOLDING	550
-	300-800	RHI/8 (total 3 meters)	HYDRAULIC	580
-	300-800	RHI/12 (total 4,60 meters)	HYDRAULIC	1090
*	300-800	RHI/13 (total 5,00 meters)*	HYDRAULIC *	1350
*	300-800	RHI/16 (total 6,00 meters)*	HYDRAULIC *	1550
*	300-800	RHI/19 (total 7,20 meters)*	HYDRAULIC *	1700

RHF/ = fixed frame

RHR/ = mechanical folding frame

RHI/ = hydraulic folding frame

*** = Vertical folding**



Rolling cultivator
working on maize







INTER-ROW CULTIVATOR WITH VIBRANT TINES

MAIA

INTER-ROW CULTIVATORS BADALINI ARE VERY HIGH AND THEY ALLOW TO WORK IN MAIZE FOR TWO TIMES OR THEY PERMIT TO ENTER IN HIGH CULTIVATIONS SUCH AS ROSES AND ARTICHOKES. THE PARTICULAR PRESSURE SPRING KEEPS THE MACHINE ON SOIL AND ALLOWS THE PENETRATION WITHOUT PROBLEMS ALSO IN HARD SITUATIONS.

MOREOVER, THANKS TO THE EXCEPTIONAL STABILITY OF THE MACHINE, THE SPEED CAN BE INCREASED WITH REDUCTION OF THE WORKING COSTS.



CULTIVATOR FOR WORK ON MAIZE WITH FERTILIZER DISTRIBUTOR



INTER-ROW CULTIVATOR WITH HYDRAULIC FOLDING FRAME

HIGH-EFFICIENCY MACHINES FOR A MODERN AGRICULTURE

EASY REGULATION



ALL THE MODELS ARE PROVIDED WITH INDEPENDENT PARALLELOGRAM. EVERY SINGLE ARTICULATED JOINT IS BUSHED WITH DOUBLE BUSHING IN NYLON AND HARD METAL BUSHING. MOREOVER A LUBRICATOR WITH CHAMBER AND RESERVE IS MOUNTED ON EVERY JOINT.



AVAILABLE VERSIONS:
WITH CAST STEEL FRAME

MODEL **SX/**

WITH TUBULAR FRAME

MODEL **SH/**

IMPORTANT PECULIARITY OF THE MACHINE IS THE DEPTH REGULATION BY A HANDLE. THE REAL MEASURE IS SHOWN BY A PARTICULAR INDICATOR WHICH PERMITS THE MICROMETRIC SIGHT OF THE WORKING DEPTH.



STANDARD EQUIPMENT:
CE Regulations equipments
Duck foot sweeps
Supporting feet
Wheels in rubber with double bearings and dust cover
Wheels in rubber with handle on each weeding unit
Parallelogram with pressure springs
Parallelogram with 4 lubricators and hard metal bushings

MAIA

FOR SOYA BEAN, SUGAR BEET, ETC.

MOD. (ST) FOR ROWS WIDTH FROM mm 450 TO mm 600
WITH 3 SPRINGS ON CENTRAL UNITS AND 2 ON SIDE UNITS (WORKING WIDTH 250/350 mm)

HP	MODEL	UNITS NR.	ROWS NR.	FRAME meters	kg
50-60	SXnF/5(3ST+2SS)-M	5	4	2,40 fixed	350
50-80	SXnR/7(5ST+2SS)-M	7	6	FOLDING	490
80-130	SXnI/13(11ST+2SS)-M	13	12	HYDRAULIC	1195

FOR MAIZE, SUNFLOWER, TOBACCO, ETC.

MOD. (L) FOR ROWS WIDTH FROM mm 700 TO mm 800
WITH 5 SPRINGS ON CENTRAL UNITS AND 3 ON SIDE UNITS (WORKING WIDTH 450/550 mm)

40-70	SXnF/3L-M	3	3	2,40 fixed	320
50-90	SXnF/5(3L+2ST)-M	5	4	3,00/3,30 fixed	420
50-90	SXnR/5(3L+2ST)-M	5	4	FOLDING	440
50-90	SXnI/5(3L+2ST)-M	5	4	HYDRAULIC	470
70-110	SXnF/7(5L+2ST)-M	7	6	5,00 fixed	560
70-110	SXnI/7(5L+2ST)-M	7	6	HYDRAULIC	600
90-130	SXnI/9(7L+2ST)-M	9	8	HYDRAULIC	995
120-180	SXnI/13(11L+2ST)-M	13	12	HYDRAULIC	1500

FOR TOBACCO, TOMATOES, ETC.

MOD. (SL) FOR ROWS WIDTH FROM mm 900 TO mm 1500
WITH 7 SPRINGS ON CENTRAL UNITS AND 5 ON SIDE UNITS (WORKING WIDTH 650/750 mm)

50-80	SXFn/3(1SL+2L)-M	3	2	2,40 fixed	300
60-100	SXRn/4(2SL+2L)-M	4	3	FOLDING	450

SXnF/ = fixed frame
SHR/ = mechanical folding frame
SHI/ = hydraulic folding frame



On the left:
INTER-ROW
CULTIVATOR FOR
MAIZE IN 6 ROWS WITH
WIDTH OF 75 cm AND
HYDRAULIC FOLDING
FRAME.

MODEL **SHI/7L-M** WITH
PROTECTIONS SHIELDS
AND 5 BLADES FOR
EACH WEEDING UNIT.







DIANA

CULTIVATOR for TOMATOES and SUGAR BEETS



THE GREAT ACCURACY WE USED IN PRODUCING WEEDER PERMITS THE MACHINE TO WORK VERY CLOSE TO THE PLANT IN ORDER TO ELIMINATE THE HAND-HOEING BETWEEN THE LITTLE PLANTS. THE REGULATION OF THE WORKING DEPTH IS MADE WITH GREAT EASINESS. THE SLIDEWAYS ARE MILLED AND THE BOLTS OF FLASKS ARE SHROUDED INTO THE SUPPORT IN ORDER TO AVOID THAT YOU HAVE



BUSHED PRECISION STEERING UNIT AND WHEELS ON BEARINGS



CULTIVATOR FOR 3 ROWS OF TOMATOES WITH
HYDRAULIC FOLDING FRAME
MOD. SHI/6L-D + BACK COMBS



MILLIMETRIC REGULATION
OF WORKING DEPTH



HIGH-EFFICIENCY MACHINES FOR A MODERN AGRICULTURE

EASY REGULATION



IMPORTANT PECULIARITY OF THE MACHINE IS THE DEPTH REGULATION BY A HANDLE. THE REAL MEASURE IS SHOWN BY A PARTICULAR INDICATOR WHICH PERMITS THE MICROMETRIC SIGHT OF THE WORKING DEPTH.



AVAILABLE VERSIONS:
WITH CAST STEEL FRAME

MODEL **SX/**

WITH TUBULAR FRAME

MODEL **SH/**

IMPORTANT PECULIARITY OF THE MACHINE IS THE DEPTH REGULATION BY A HANDLE. THE REAL MEASURE IS SHOWN BY A PARTICULAR INDICATOR WHICH PERMITS THE MICROMETRIC SIGHT OF THE WORKING DEPTH.



CULTIVATOR FOR 5 ROWS OF TOMATOES WITH WIDTH OF 150 cm AND HYDRAULIC ROAD CLOSING TO 2,50 METERS. MODEL **SHI/10L-D** WITH HYDRAULIC STEERING UNIT AND BACK COMBS.



STANDARD EQUIPMENT:

CE Regulations equipments
Supporting feet
Wheels in rubber with double bearings and dust cover
Adjustable flasks in micrometric width
Wheels in rubber with handle on each weeding unit
Parallelogram with pressure springs
Parallelogram with 4 lubricators and hard metal bushings

DIANA

FOR SOYA BEAN AND SUGAR BEETS

MOD. (ST) FOR ROWS WIDTH FROM mm 450 TO mm 500

WITH 2 DISCS AND 3 BLADES ON EACH UNIT (WORKING WIDTH 250/300 mm)

HP	MODEL	UNITS NR.	ROWS NR.	FRAME meters	WEIGHT kg
50-55	SXnF/5(3ST+2SS)-D	5	4	2,40 fixed	360
50-70	SXnF/7(5ST+2SS)-D	7	6	3,00/3,30 fixed	500
50-70	SXnR/7(5ST+2SS)-D	7	6	FOLDING	510
60-90	SXnF/9(7ST+2SS)-D	9	8	4,00 fixed	560
60-90	SXnR/9(7ST+2SS)-D	9	8	FOLDING	570
60-90	SXnI/9(7ST+2SS)-D	9	8	HYDRAULIC	590
90-130	SXIn/13(11ST+2SS)-D	13	12	HYDRAULIC	1020

FOR TOMATOES

MOD. (L) FOR ROWS WIDTH FROM mm 1300 TO mm 1600

WITH 1 DISC AND 4 BLADES ON EACH UNIT (WORKING WIDTH 450/650 mm each unit)

40-60	SXnF/2L-D	2	1	2,00	180
60-100	SXnI/6L-D	6	3	HYDRAULIC	520
60-100	SXnI/4(SL+2L)-D	4	3	HYDRAULIC	480
70-110	SXnI/10L-D	10	3x2	HYDRAULIC	990

FOR MAIZE, SUNFLOWER, ETC.

MOD. (L) FOR ROWS WIDTH FROM mm 700 TO mm 800


WITH 2 DISCS AND 3 BLADES FOR EACH UNIT (WORKING WIDTH 450/550 mm)

50-60	SXnF/3L-D	3	3	2,40 fixed	280
60-90	SXnR/5(3L+2ST)-D	5	4	FOLDING	380
70-110	SXnI/7(5L+2ST)-D	7	6	HYDRAULIC	530

SXnF/ = fixed frame

SXnR/ = mechanical folding frame

SXnI/ = hydraulic folding frame

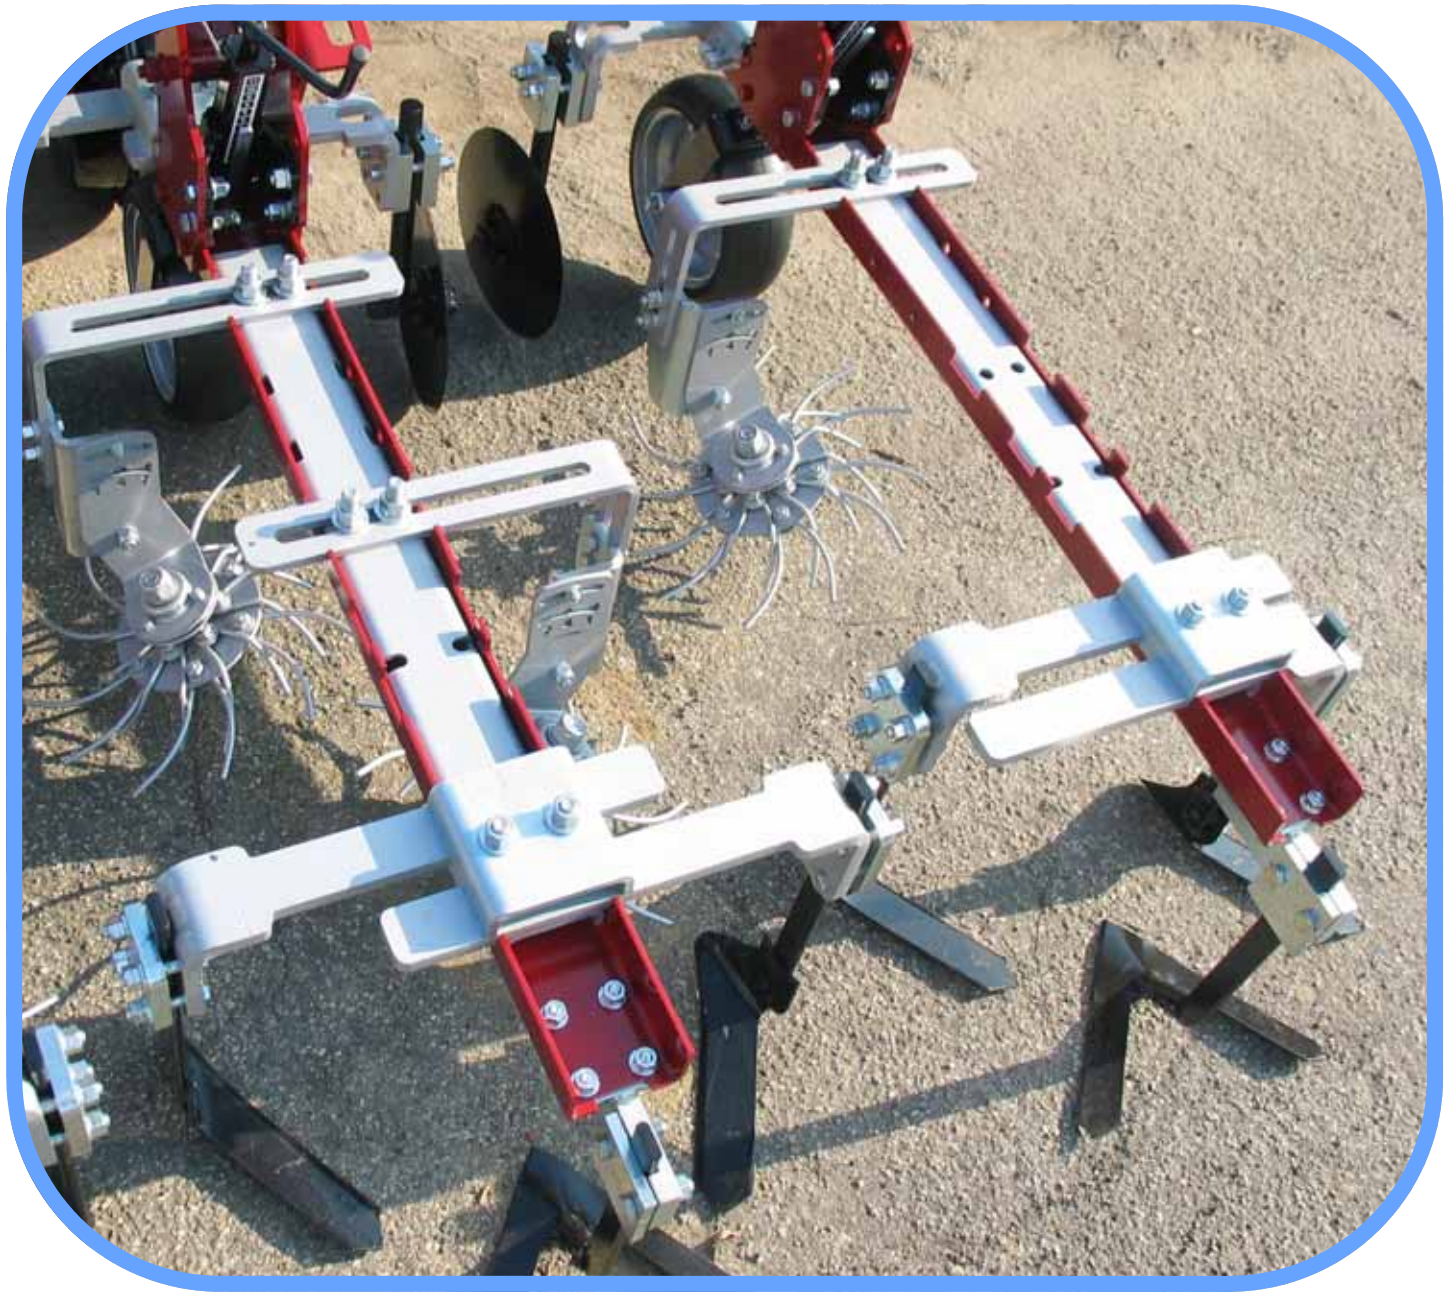

STANDARD EQUIPMENT:
CE Regulations equipments
Supporting feet
Wheels in rubber with double bearings and dust cover
Wheels in rubber with handle on each weeding unit
Parallelogram with pressure springs
Parallelogram with 4 lubricators and hard metal bushings
FOR SOYA BEAN, BEETS, ETC.
FOR ROWS WIDTH FROM mm 450 TO mm 550
WITH 2 MARGUERITES ON CENTRAL UNITS AND 1 ON SIDE UNITS
WITH 2 DISCS AND 1 BLADE ON CENTRAL UNITS (WORKING WIDTH 250/300 mm) AND 1 DISC AND 1 BLADE ON SIDE UNITS

HP	MODEL	UNITS NR.	ROWS NR.	ROWS mm	FRAME meters	kg
50-60	SXnF/3ST-BIO (1+2)	3	2	450-500	2,40 fixed	360
50-80	SXnF/4ST-BIO (2+2)	4	3	450-500	2,40 fixed	470
50-80	SXnF/5ST-BIO (3+2)	5	4	450-500	2,40 fixed	560
50-80	SXnF/7ST-BIO (5+2)	7	6	450-500	3,00/3,30 fixed	770
60-100	SXnl/9ST-BIO (7+2)	9	8	450-500	HYDRAULIC	1070
80-130	SXnl/13ST-BIO (11+2)	13	12	450-500	HYDRAULIC*	1900

FOR MAIZE, SUNFLOWER, TOBACCO, ecc.
FOR ROWS WIDTH FROM mm 650 TO mm 800
WITH 2 MARGUERITES ON CENTRAL UNITS AND 1 ON SIDE UNITS
WITH 2 DISCS AND 3 BLADES ON CENTRAL UNITS (WORKING WIDTH 450/600 mm) AND 1 DISC AND 2 BLADES ON SIDE UNITS

40-70	SXnF/3L-BIO	3	3	600-750	2,40 fixed	380
40-70	SXnF/3 (1L+2ST)-BIO	3	2	600-750	2,40 fixed	350
45-75	SXnF/4 (2L+2ST)-BIO	4	3	600-750	2,40 fixed	460
50-80	SXnF/5 (3L+2ST)-BIO	5	4	600-750	2,40 fixed	580
50-80	SXnl/5 (3L+2ST)-BIO	5	4	600-750	FOLDING	630
60-90	SXnF/7 (5L+2ST)-BIO	7	6	600-750	HYDRAULIC	800
60-90	SXnl/7 (5L+2ST)-BIO	7	6	600-750	5,00 fixed	850
90-110	SXnl/9 (7L+2ST)-BIO	9	8	600-750	HYDRAULIC*	1700
100-120	SXnl/13 (11L+2ST)-BIO	13	12	600-750	HYDRAULIC*	2100

FOR TOMATOES ecc.
FOR ROWS WIDTH FROM mm 1300 TO mm 1600
WITH 2 MARGUERITES ON CENTRAL UNITS AND 1 ON SIDE UNITS
CON 2 DISCS E 2 BLADES ON CENTRAL UNITS (WORKING WIDTH 450/600 mm) AND 1 DISCS AND 3/4 BLADES ON SIDE UNITS

50-80	SXnF/2L-BIO	2	1	1300-1600	2,40 fixed	280
50-80	SXnF/3 (1ST+2L)-BIO	3	1 paired row	450-600	2,40 fixed	360
60-100	SXnF/5 (1ST+4L)-BIO	5	1 paired row	450-600	3,00/3,30 fixed	560
60-100	SXnl/6L-BIO	4	3	1300-1500	HYDRAULIC	850
80120	SXnF/9 (3ST+6L)-BIO	9	3 paired rows	450-600	5,00 fixed	1000
80120	SXnl/9 (3ST+6L)-BIO	9	3 paired rows	450-600	HYDRAULIC*	1600

SXnF/ = fixed frame
SXnR/ = mechanical folding frame
SXnl/ = hydraulic folding frame
*** = VERTICAL FOLDING**
Couple of wheels in iron on frame
COUPLE OF WHEELS IN RUBBER
Manual steering unit with wheels
FRONT THREE POINT LINKAGE
ON REQUEST:

	WEIGHT kg
87-59545,03 Unit SXn/L with 2 MARGUERITES, 2 DISCS AND 3 BLADES	100
87-59545,04 Unit SXn/L with 1 MARGUERITE, 1 DISC AND 4 BLADES (half row)	95
87-59543,02 Unit SXn/ST with 2 MARGUERITES, 2 DISCS, 1 HOE	90
87-59543,04 Unit SXn/ST with 2 MARGUERITES, 2 DISCS, 3 HOE	98
87-59543,03 Unit SXn/ with 1 MARGUERITE, 1 DISC, 2 HOE (half row)	80
865193401 COUPLE OF TURNING MARGUERITES WITH BARS	30
865193431/32 SINGLE MARGUERITE WITH STEM	15

THE SOLUTION FOR WEED CONTROL ON THE ROW, SIMPLE AND ECONOMIC



BIO-WEEDER between plants. It completely eliminates the chemical weed control, both in organic and in traditional agriculture.



PATENT PENDING
N. 002849588



Weeding on the row with
simplicity and efficiency

The working speed is 3/5 of
Km / h. The machine does not
damage the plants and
removes the weeds in the row
with economy and practicality.
It requires no maintenance and
can be used in all plantations.

WWW.BADALINI.COM



European Patent Office
80298 MUNICH
GERMANY

Questions about this communication ?
Contact Customer Services at info@epo.org or info@ipo.it



Badalini, Giorgio
Strada Delmona, 1
46017 Rivarolo Mantovano MN
ITALIE

Date 13.01.16

Applicant/Proprietor Badalini Srl	Application No./Patent No. 15425082.3
--------------------------------------	--

Designation as inventor - come indicazione under Rule 7(2) EPC

You have been designated as inventor in the above-mentioned European patent application. Below you will find the data contained in the designation of inventor and further data mentioned in Rule 143(1) EPC:

DATE OF FILING

08.10.16

PRIORITY

TITLE

APPARATUS FOR REMOVING WEEDS, AND
ASSOCIATED AGRICULTURAL MACHINE

DESIGNATED STATES

: AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

INVENTOR (PUBLISHED = 1, NOT PUBLISHED = 0):

1: Badalini, Giorgio/Strada Delmona, 1/46017 Rivarolo Mantovano MN/IT

DECLARATION UNDER ARTICLE 81 EPC:

The applicant(s) has (have) acquired the right to the European patent

Receiving Section



MECHANICAL WEED CONTROL BETWEEN THE PLANTS

ROTATING BIO-WEEDER ON THE ROW

EXCEPTIONAL HOURLY PRODUCTIVITY

This machine allows you to remove the weeds in the row simply and effectively. It is possible to combine it both with manual or satellite steering unit.

It is the dream of every farmer who works in organic farming.

It is not complicated (as any electronic machines) and it is very efficient (as opposed to the rubber tools). It is practical and durable. Everyone can use it. It can be used as a standalone machine (recommended) or mount the rotating parts on your machine, as an accessory.


A simple and ingenious invention.

The only condition is the use of the machine when the cultivated plant is small, that is in good condition for mechanical weed control.

This machine is so economical that can reduce weed control costs even in conventional farming.



**The working speed must be between
4 and 12 km / hour.**

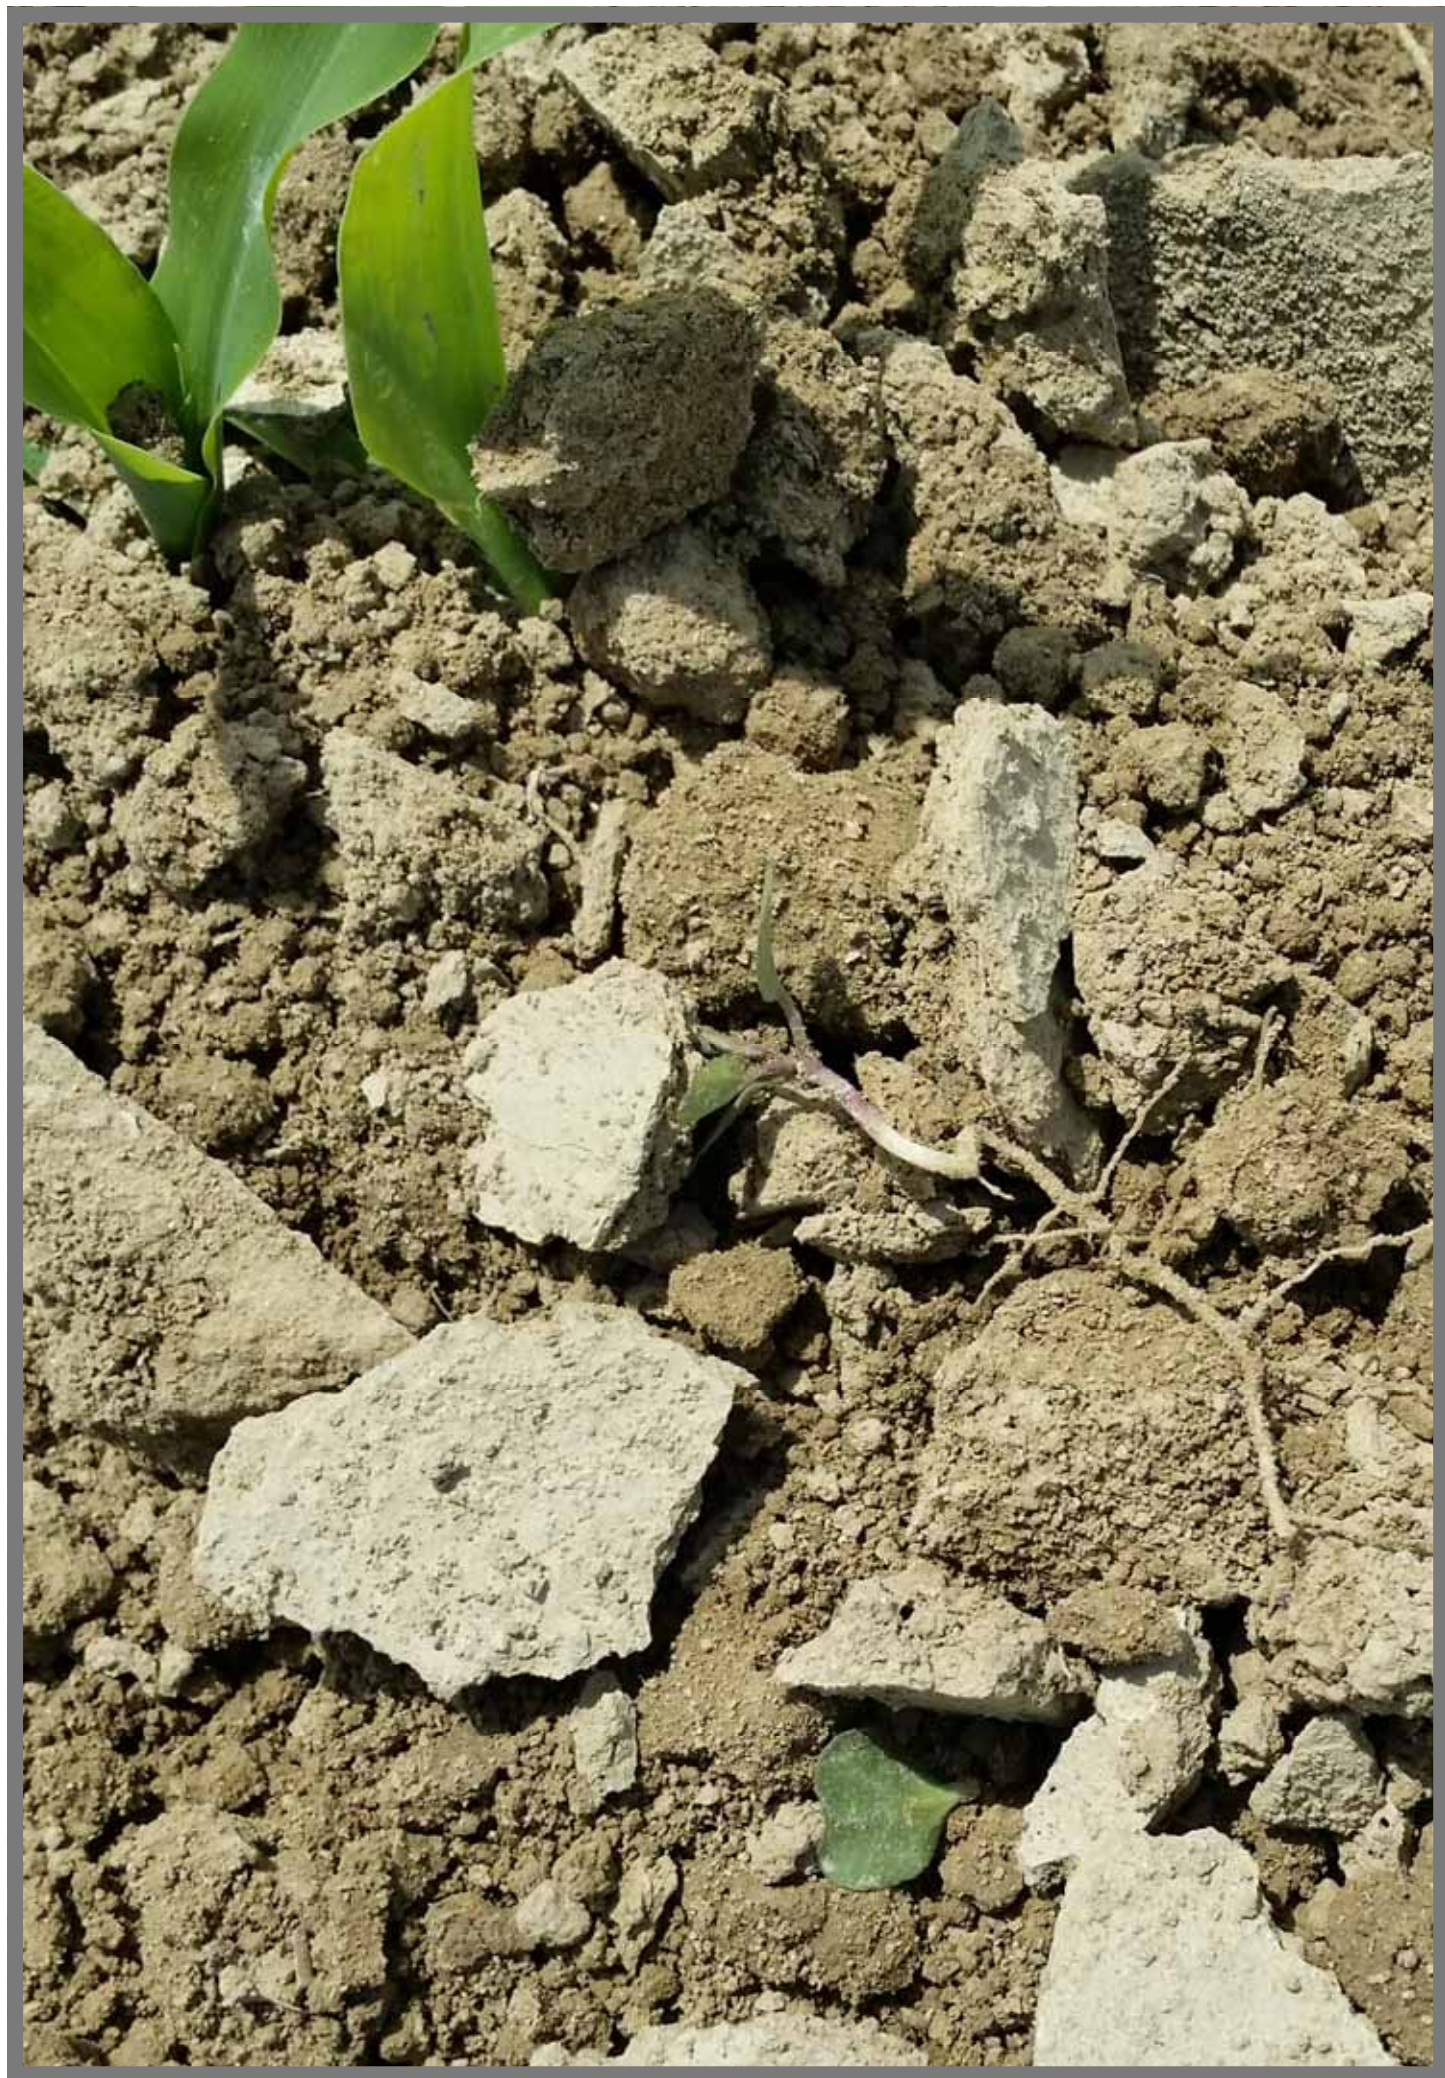










“L”

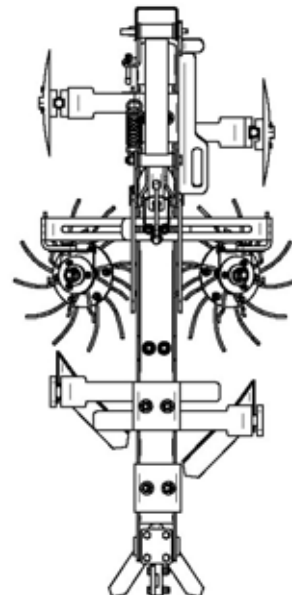

1/2 “L”

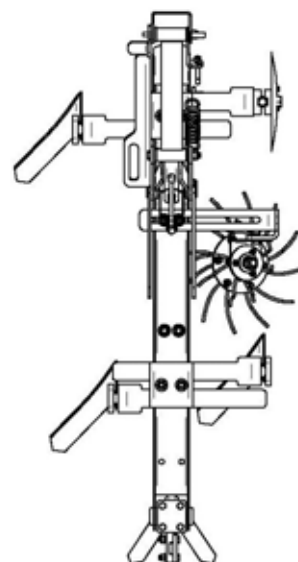

“ST”

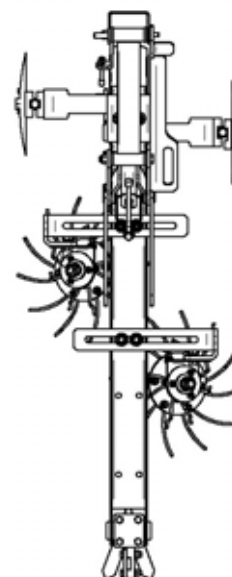














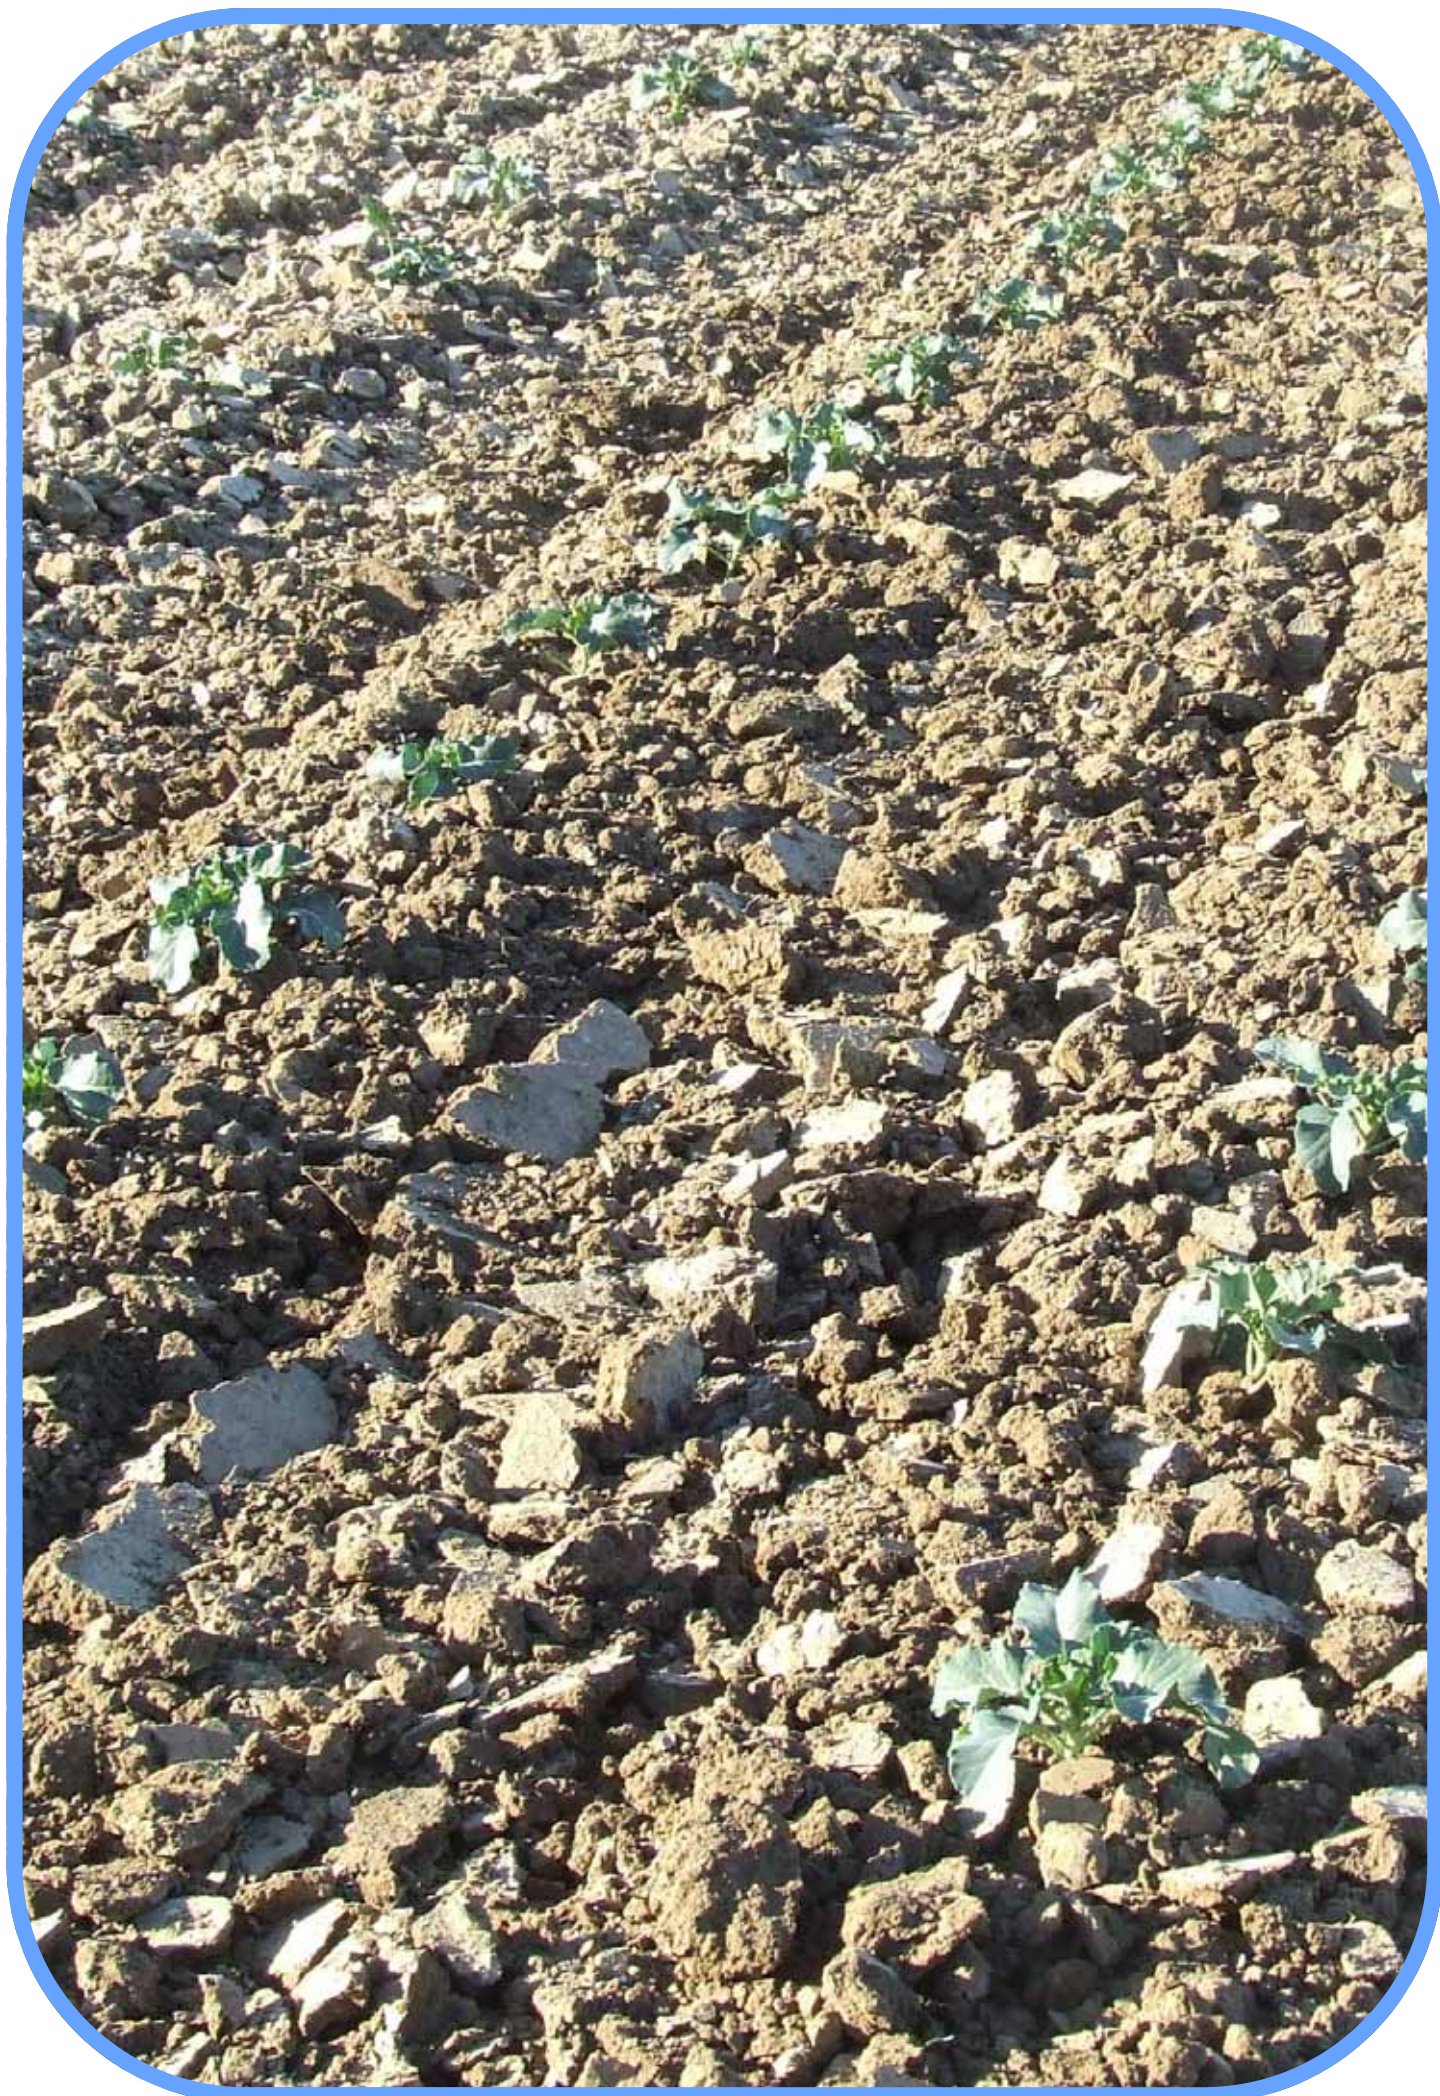



BADALINI S.R.L. - STRADA DELMONA 1
46017 RIVAROLO MANTOVANO (MN) ITALIE
TEL. +39-0376-99149 r.a. FAX +39-0376-99641
E-MAIL: badalini@badalini.it
WEB: www.badalini.it

ROTATING INTER-ROW CULTIVATOR SRX/



ROMEO SPECIAL

ROTATING INTER-ROW CULTIVATOR



STANDARD EQUIPMENT:

CE Regulations equipments

Frame in cast steel

Couple of wheels on frame

Stars on double bearings and dust cover

Oscillating element with adjustable pressure spring

1 star on each element THICKNESS=8mm

Minimum distance among 2 stars 80mm



WORK BETWEEN THE ROWS

FOR SALAD SOYA BEANS AND BEETS **4 ELEMENTS FOR EACH ROW (2 ELEMENTS 1/2 ROW)**

N.	ROWS mm	MODEL	N. STARS	FRAME meters	WEIGHT kg
8	100-170	SRX/8	8	2,00 fixed	
8	180-300	SRX/16	16	2,00 fixed	
6	450-500	SRXR/30	30	FOLDING	
12	450-500	SRXI/60 *	60	HYDRAULIC *	

WORK BETWEEN THE ROWS

FOR MAIZE AND SUNFLOWERS **6 ELEMENTS FOR EACH ROW (3 ELEMENTS 1/2 ROW)**

4	600-750	SRX/24	24	3,00 fixed	
6	700-750	SRXR/36	36	FOLDING	
6	700-750	SRXI/36	36	HYDRAULIC	
8	700-750	SRXI/48 *	48	HYDRAULIC *	

TOTAL WORK

FOR ALL CULTIVATIONS

-	300-800	SRX/40 (total 3 meters)	40	3,00 fixed	
-	300-800	SRXR/40 (total 3 meters)	40	FOLDING	
-	300-800	SRXI/40 (total 3 meters)	40	HYDRAULIC	
-	300-800	SRXI/60 (total 4,60 meters)	60	HYDRAULIC	
*	300-800	SRXI/64 (total 5,20 meters) *	64	HYDRAULIC *	
*	300-800	SRXI/78 (total 6,20 meters)*	78	HYDRAULIC *	
*	300-800	SRXI/90 (total 7,20 meters)*	90	HYDRAULIC *	

SRX/ = fixed frame

SRXR/ = mechanical folding frame

SRXI/ = hydraulic folding frame

*** = VERTICAL FOLDING**

A RICHIESTA:

	Complete rolling unit (star with thickness 8 mm)	WEIGHT kg
	Complete rolling unit (star with thickness 15 mm)	
	Couple of plant protections	



THE IDEAL MACHINE FOR DRAINAGE IN TOMATOES AND VINEYARD





TROLL

STANDARD EQUIPMENT:
CE Regulations equipments
Back rollers
Semi-lunar tine protection
Interchangeable share
Safety bolts 16mm

GRASSLAND SUBSOILER

MOD. CMS/

FOR ROWS OF mm 1250-1600 WORK mm 500 (depth)

MODEL WITH ROLLERS - REGULATION BY HOLES					
HP	MODEL	N. OF TINES	ROWS NR.	FRAME m	WEIGHT kg
60-80	CMS/2R	2	2	2,00	650
60-80	CMS/4R	4	2	2,00	900
60-80	CMS/2R	2	2	2,50	700
MODEL WITH ROLLERS - REGULATION BY HANDLE					
HP	MODEL	N. OF TINES	ROWS NR.	FRAME m	WEIGHT kg
60-80	CMS/2RM	2	2	2,00	690
60-80	CMS/2RM	2	2	2,50	740
100-130	CMS/3RM	3	3	2,50	920
MODEL WITH ROLLERS and ARTICULATED DISC - REGULATION BY HOLES					
HP	MODEL	N. OF TINES	ROWS NR.	FRAME m	WEIGHT kg
60-80	CMS/2RD	2	2	2,00	770
100-130	CMS/3RD	3	3	2,50	1000
MODEL WITH ROLLERS and ARTICULATED DISC - REGULATION BY HANDLE					
HP	MODEL	N. OF TINES	ROWS NR.	FRAME m	WEIGHT kg
60-80	CMS/2RDM	2	2	2,00	810
100-130	CMS/3RDM	3	3	2,50	1040



BADALINI S.R.L. - STRADA DELMONA 1
 46017 RIVAROLO MANTOVANO (MN) ITALIE
 TEL. +39-0376-99149 r.a. FAX +39-0376-99641
 E-MAIL: badalini@badalini.it
 WEB: www.badalini.it

FERTILIZER DISTRIBUTOR

PEGASUS

SPX/

WITH CAPACITY OF LITRES
930 - 1240 - 2500

LINEAR FERTILIZER DISTRIBUTOR COMPLETELY IN STAINLESS STEEL, SUITABLE FOR ALL WORK CONDITIONS AND IN ALL CULTIVATIONS.

- HIGH PRECISION
- FERTILIZER SAVE
- VERSATILITY OF EMPLOYMENT

THE MODELS SPX/1400 AND SPX/2000 CAN DISTRIBUTE ORGANIC FERTILIZERS, POULTRY MANURE AND GUANO.

HIGH LOADING CAPACITY: THE HOPPER IS AVAILABLE WITH CAPACITY FROM 340 TO 2.500 LITRES; THIS ASSURES A PROLONGED WORKING AUTONOMY AND REDUCED LOADING TIMES.

HIGH WORKING SPEED: UNTIL 15 KM/HOUR.



THE DISTANCE BETWEEN THE LOCALIZATION PIPES CAN BE REGULATED ACCORDING TO THE DISTANCE USED FOR THE DIFFERENT CROPS.

IT IS POSSIBLE TO WORK ON ANY SOWING DISTANCE, SIMPLY ADDING ONE OR MORE PIPES.

THE REGULATION OF THE SPILLAGE OF FERTILIZER HAPPENS THROUGH A HYDRAULIC CYLINDER ENDOWED WITH LOCKING SCREW. THE SCREW WITH MICROMETRIC REGULATION ALLOWS A CONSTANT SPILLAGE OF MATERIAL. MOREOVER THE CYLINDER ALLOWS TO STOP THE SPILLAGE OF FERTILIZER AT THE END OF THE ROW, AVOIDING DISTRIBUTION IN HEADLANDS AND WHERE IT IS NOT NECESSARY.



STANDARD EQUIPMENT:

CE Regulations equipments, cardan shaft, tarpaulin

Bolts in stainless steel

Fertilizer distributor in stainless steel

Possibility to use every type of fertilizer

Possibility to use with every rows width

Adjustable linkage in height

Adjustable slide bars

Hydraulic and micrometric regulation

Great productivity capacity at high speeds (10/20 quintals pro hectar)

Possibility to use "POULTRY MANURE" fertilizer (10/20 quintals pro hectar)

HYDRAULIC JACK FOR CLOSING OF FERTILIZER

PEGASUS



ONE FERTILIZER HOPPER with FEET

FOR MAIZE, SUNFLOWER, SOYA BEANS, SUGAR BEETS AND TOMATOES

MODEL	FRAME meters	LITRES	N. of fall pipes MOUNTED	N. of fall pipes MAXIMUM	WEIGHT kg
SPX/300x4	2,20 fixed	340	4	12	250
SPX/900x4	2,50 fixed	930	4	8	280



ONE FERTILIZER HOPPER with WHEELS

FOR MAIZE, SUNFLOWER, SOYA BEANS, SUGAR BEETS AND TOMATOES

MODEL	FRAME meters	LITRES	N. of fall pipes MOUNTED	N. of fall pipes MAXIMUM	WEIGHT kg
SPX/900x6	2,50 fixed	930	6	8	445
SPX/1400x6	3,10 fixed	1240	6	12	470
SPX/2000x6	3,10 fixed	2500	6	12	600



DOUBLE FERTILIZER HOPPER with WHEELS

FOR TOMATOES and VEGETABLES

MODEL	FRAME meters	LITRES	N. of fall pipes MOUNTED	N. of fall pipes MAXIMUM	WEIGHT kg
SPX/1800x8+8	2,50 fixed	930+930	8	16	1600
SPX/2800x12+12	4,50/3,50	1240+1240	12	24	2000



OPTIONAL ON REQUEST

- COUPLE OF HYDRAULIC MARKERS
- JOLLY TRAILER FOR ROAD TRANSPORT
- SET TO LAY UNDERGROUND FERTILIZER
- BACK COMBS



COUPLE OF HYDRAULIC MARKERS



JOLLY TRAILER



BACK COMBS



SET TO LAY UNDERGROUND FERTILIZER



BADALINI S.R.L.
Strada Delmona 1 - 46017 RIVAROLO MANTOVANO
(MANTOVA) ITALIEN
TEL. (+39) 0376-99149 r.a. FAX (+39) 0376-99641
E-MAIL: badalini@badalini.it WEB: www.badalini.it











BADALINI S.R.L.

Registered Office: Strada Delmona 1 - 46017 RIVAROLO MANTOVANO (Mn) - ITALY

Authorized Capital: Euro 30.000,00 i.v.

TEL. (+39) 0376/99149 FAX (+39) 0376/99641

Vat Number IT 02118990205

badalini@badalini.it

www.badalini.it